

210-060

Number: 210-060
Passing Score: 800
Time Limit: 120 min
File Version: 1.0

210-060

Implementing Cisco Collaboration Devices

A

QUESTION 1

Which two technologies comprise a Cisco Presence deployment? (Choose two.)

- A. Cisco Unified Presence Server
- B. Cisco Unity Connection
- C. Cisco Unified Communications Manager
- D. Active Directory
- E. Cisco Unified Border Element
- F. Cisco Expressway

Correct Answer: AC

Section: (none)

Explanation


Explanation/Reference:

Explanation:

QUESTION 2

Use the router console to view the configuration and answer the question.

Exhibit1

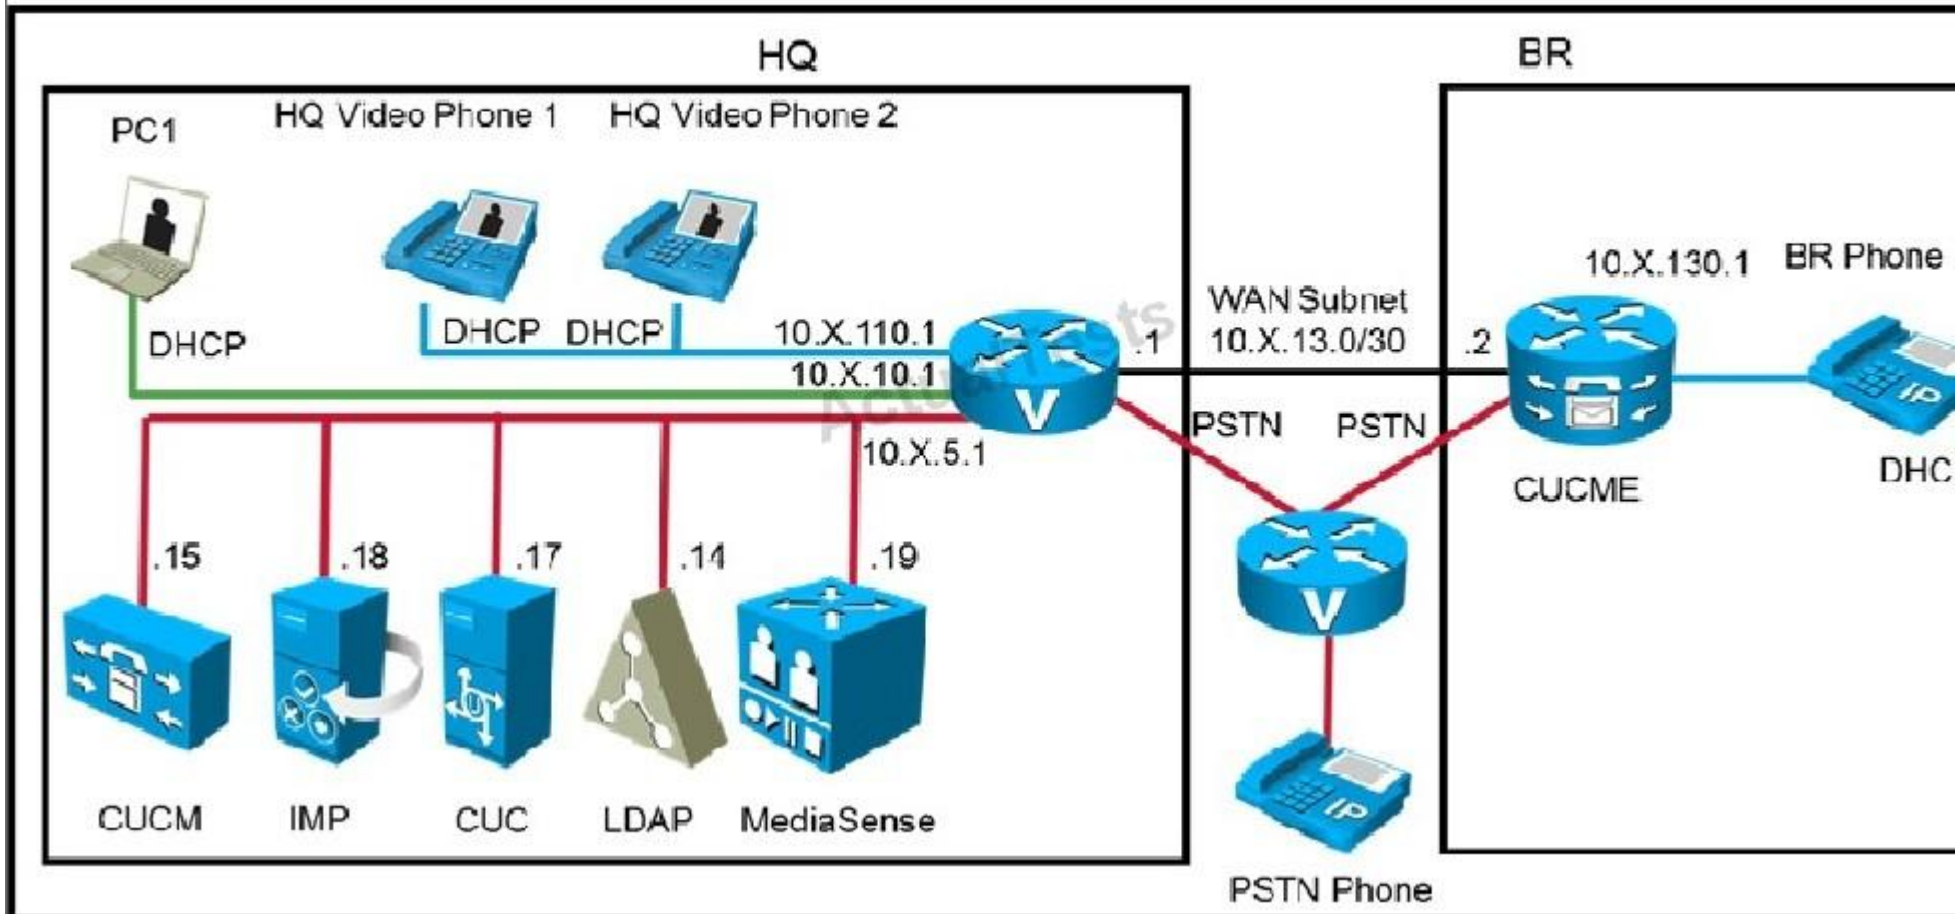

BR-Router

ActualTests

BR-Router#

Emergency calls from a Branch router phone is failing. From the router configuration information provided, why is this call failing?

- A. The dial-peer port assignment is incorrect
- B. the digit string prefix is missing
- C. The destination pattern is incorrect
- D. digit stripping needs to be performed

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The emergency dial peer configuration is shown below from the Branch routers:


```
!  
dial-peer voice 9112 pots  
  description Emergency PSTN Calls  
  destination-pattern 9112  
  port 0/0/0:15  
  prefix 112  
!  
dial-peer voice 999 pots  
  description Emergency PSTN Calls  
  destination-pattern 9999  
  port 0/0/0:15
```

Here we can see that 911 does not actually match the configured destination patterns.

QUESTION 3

Use the router console to view the configuration and answer the question.

Exhibit1

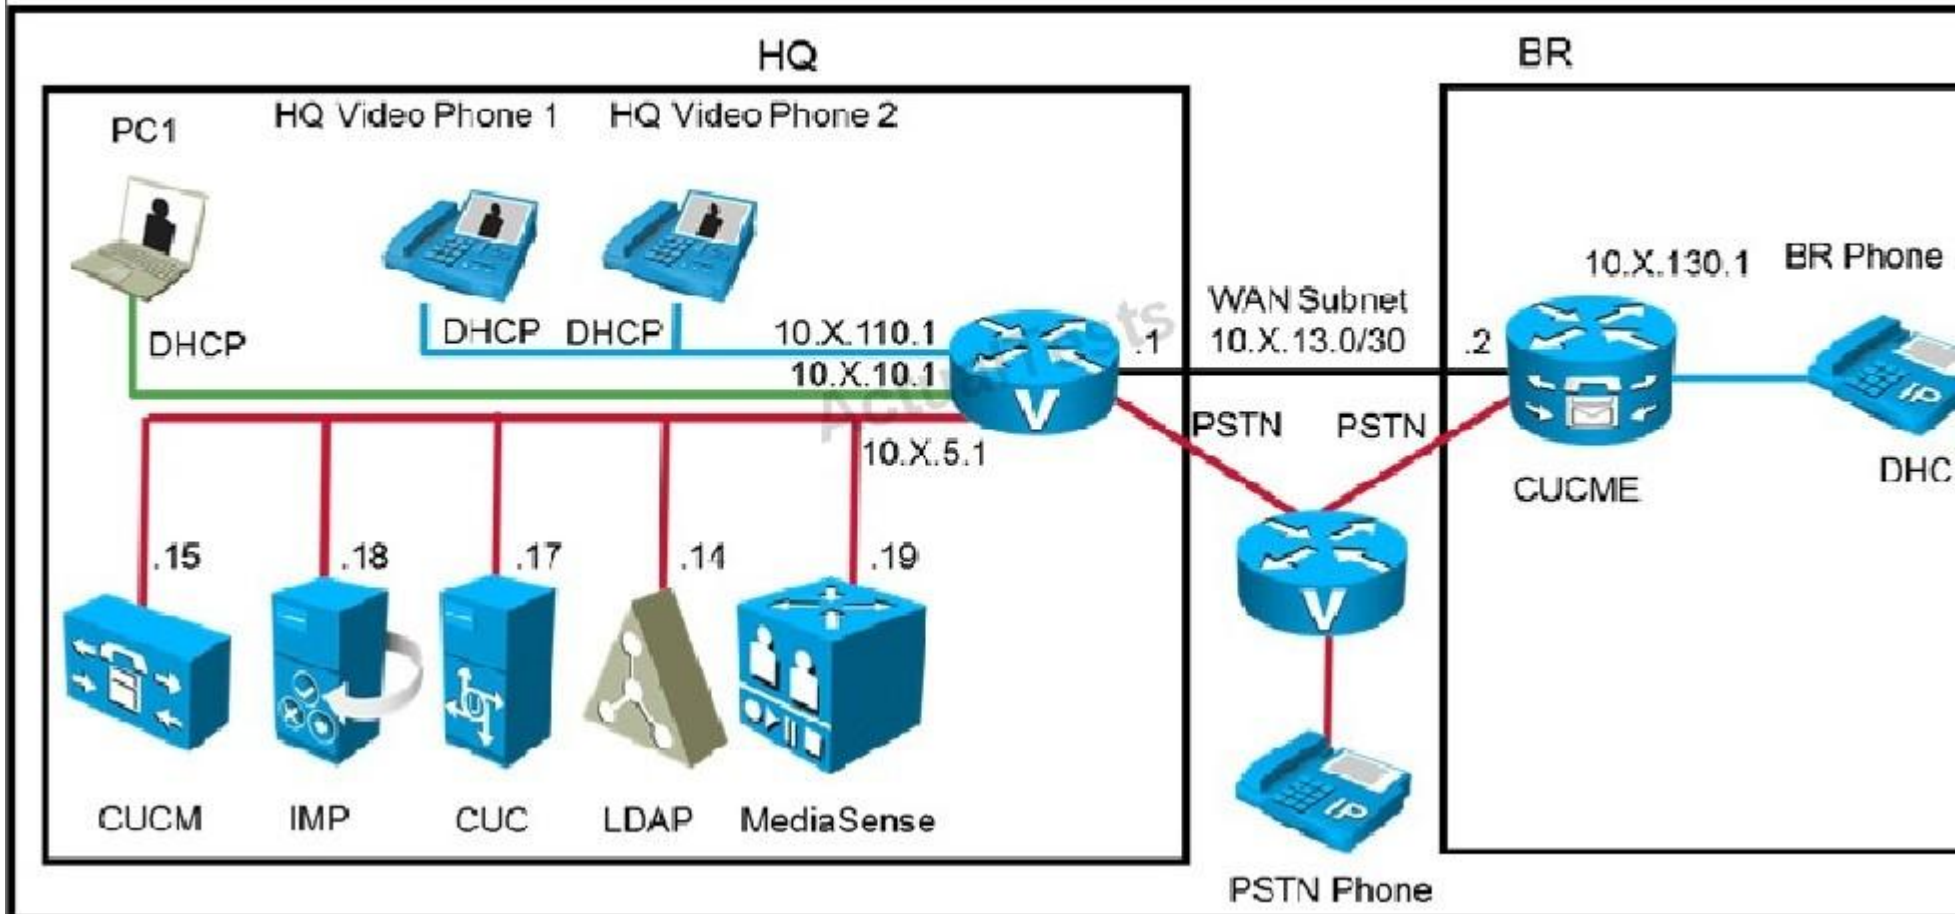

BR-Router

ActualTests

BR-Router#

International calls are also failing. Using the router configuration supplied, why are international calls failing?

- A. Prefix should be 00
- B. The character "T" cannot be used in a Pots dial pattern
- C. The port should be 0/0/0:12
- D. The destination pattern is missing a "0"

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The International dial peer configuration is shown below:


```
dial-peer voice 900 pots
description International
destination-pattern 900T
port 0/0/0:15
prefix 900
!
```

The prefix is incorrectly set to 900, not 00.

QUESTION 4

Use the router console to view the configuration and answer the question.

Exhibit1

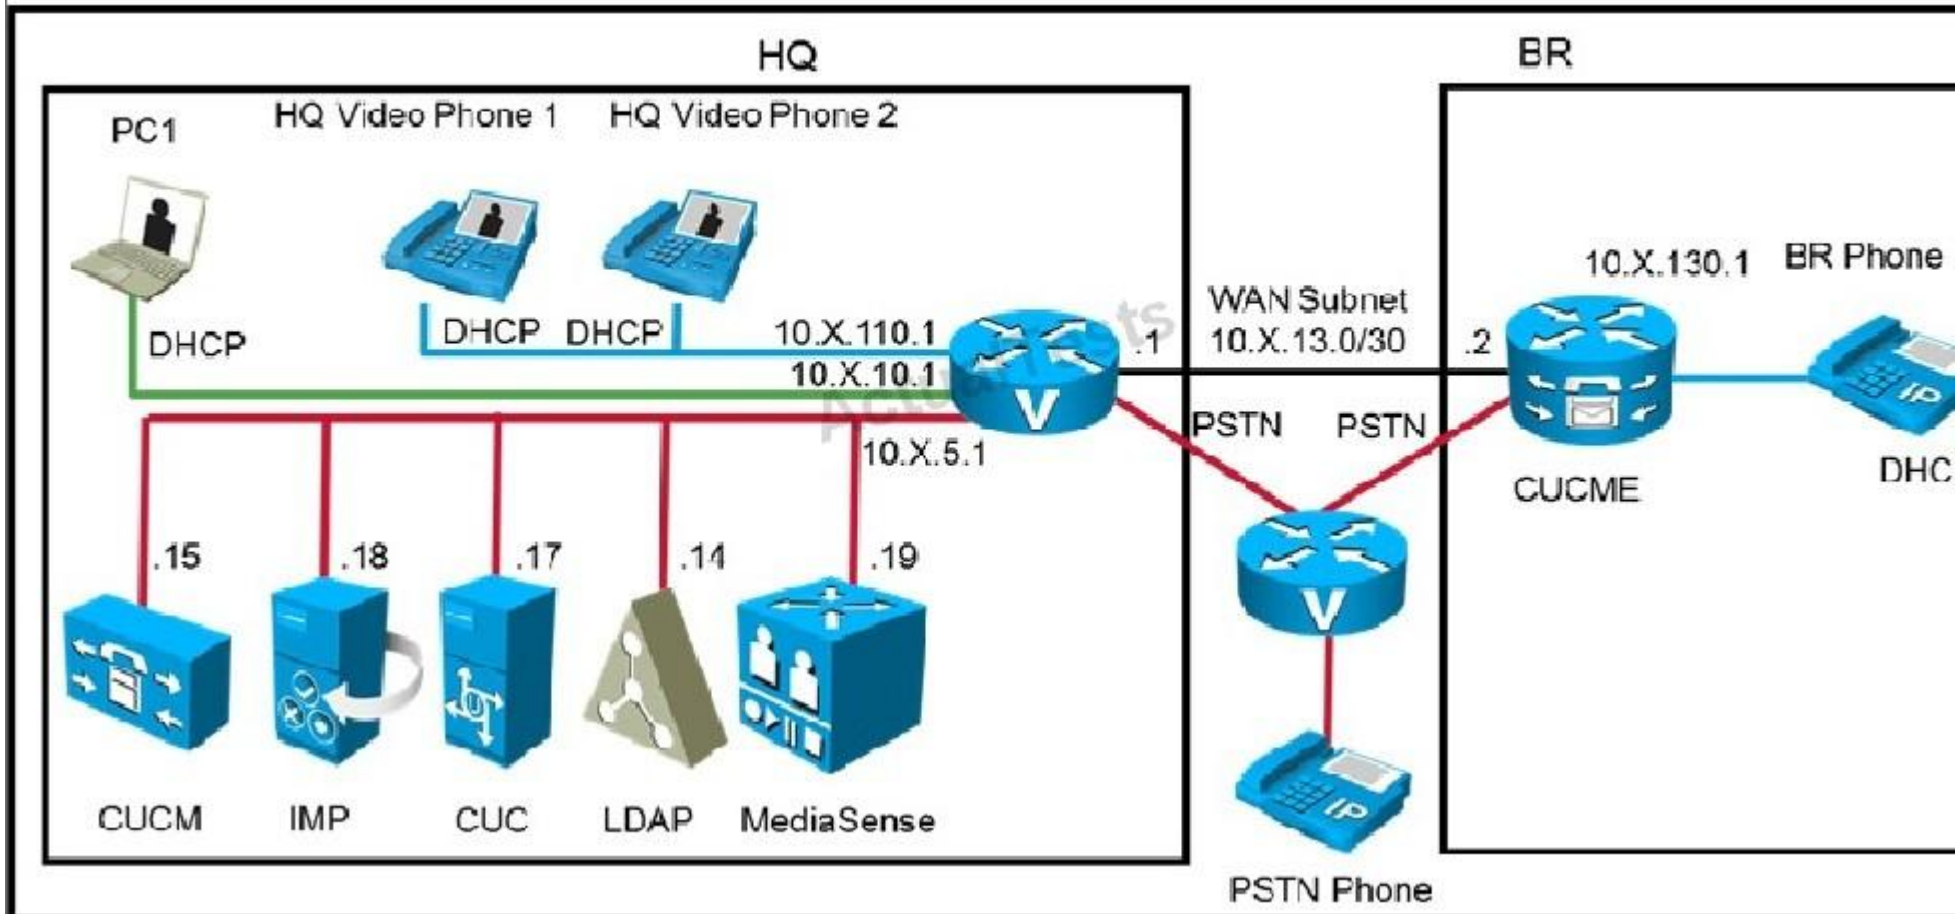

BR-Router

ActualTests

BR-Router#

Calls to National numbers are failing. Using the Branch router configuration, correctly determine why these calls are not successful

- A. The port assignment should be 0/0/0:12
- B. The destination pattern should be 90[1-9]T
- C. The character "T" cannot be used in a Pots dial pattern
- D. The digit prefix should be "00"

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The National dial peer configuration is shown below:

```
!  
dial-peer voice 910 pots  
  description National  
  destination-pattern 9[1-9]T  
  port 0/0/0:15  
  prefix 0  
!
```

Topic 2, Provision End Users and Associated Devices

QUESTION 5

An administrator group is looking to on-board multiple users with Cisco Unified Communications Manager at one time. Which option should be used?

- A. Bulk Administration Tool
- B. Product Upgrade Tool
- C. Command Lookup Tool
- D. Cisco Unified Communications Manager User Options Page

E. Cisco Upload Tool

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 6

A user wants their name to show on their phone instead of their directory number. Which configuration item allows an administrator to do this?

- A. Line Text Label
- B. Alerting Name
- C. External Phone Number Mask
- D. Caller Name
- E. Description

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 7

A user would like all calls to be forwarded to voice mail. The user's phone is not set up with a soft key for this feature. Which option accomplishes this configuration from within the Cisco Unified Communication Administrator Directory Number configuration page?

- A. Call Forward and Pickup Settings > Forward No Coverage External > Select voice mail check box
- B. Call Forward and Pickup Settings > Forward Busy External > Select voice mail check box
- C. Call Forward and Pickup Settings > Forward All > Select voice mail check box
- D. Call Forward and Pickup Settings > Forward Unregistered External > Select voice mail check box

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 8

A new user has successfully registered Cisco Jabber. Which option verifies that the Jabber client is connected to all appropriate back-end systems?

- A. Show Connection Status
- B. Report A Problem
- C. Advanced Settings
- D. About Jabber
- E. Reset Jabber

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 9

Use the exhibits below to answer the question.

Exhibit1

10/23/2014 14:40 | 2001

Phone Information

20

Model Number:	CP-9971 (Video)
IPv4 Address:	10.1.111.5
Host Name:	SEP8478ACE71D1F
Active Load:	sip9971.9-4-1-9
Last Upgrade:	12/31/81 19:02
Active Server:	10.1.5.16
Stand-by Server:	10.1.5.15

Exit

Exhibit2

Phone Type

Product Type: Cisco 9971


Device Protocol: SIP


Real-time Device Status

Registration: Unknown

IPv4 Address: None

Device Information

 Device is Active

 Device is trusted

MAC Address*

8478ACF71D1F

Description

HQ-Phone 1

Device Pool*

Default

Common Device Configuration

< None >

Phone Button Template*

Standard 9971 SIP

Softkey Template

< None >

Common Phone Profile*

Standard Common Phone Profile

Calling Search Space

phone1_css

AAR Calling Search Space

< None >

Media Resource Group List

< None >

User Hold MOH Audio Source

< None >

[View Data](#)

[View Data](#)

[View Data](#)



A new phone has been added to the Cisco Unified Communications Manager, but is not registering properly. What is causing this failure?

- A. Device Pool cannot be default
- B. phonei_css is the incorrect calling search space2
- C. 9971 Phones do not support SIP
- D. The location Hub_None has not been activated
- E. MAC address is incorrect

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The host name is a unique, fixed name that is automatically assigned to the phone based on its MAC address. However, here we see that the configured MAC address is 8478ACF71D1F, but the host name shown on the 9971 Phone Information diagram shows the host name as 8478ACE71D1F.

QUESTION 10

Use the exhibits below to answer the question.

Exhibit1

10/23/2014 14:40 | 2001

Phone Information

20

Model Number:	CP-9971 (Video)
IPv4 Address:	10.1.111.5
Host Name:	SEP8478ACE71D1F
Active Load:	sip9971.9-4-1-9
Last Upgrade:	12/31/81 19:02
Active Server:	10.1.5.16
Stand-by Server:	10.1.5.15

Exit

Exhibit2

Phone Type

Product Type: Cisco 9971


Device Protocol: SIP


Real-time Device Status

Registration: Unknown

IPv4 Address: None

Device Information

 Device is Active

 Device is trusted

MAC Address*

8478ACF71D1F

Description

HQ-Phone 1

Device Pool*

Default

Common Device Configuration

< None >

Phone Button Template*

Standard 9971 SIP

Softkey Template

< None >

Common Phone Profile*

Standard Common Phone Profile

Calling Search Space

phone1_css

AAR Calling Search Space

< None >

Media Resource Group List

< None >

User Hold MOH Audio Source

< None >

[View Data](#)

[View Data](#)

[View Data](#)



What two issues could be causing the Cisco Jabber failure shown in the exhibit? (Choose two)

- A. Incorrect username and password
- B. IM & Presence server is down
- C. User is not associated with the device
- D. IP or DNS name resolution issue
- E. CSF Device is not registered.
- F. IP Phone DN not associated with the user

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The error message shown in Jabber is "Cannot communicate with the server" which points us to a connectivity issue with IP/DNS or the server is down. All other answer choices would result in a login failure, not communication error.

QUESTION 11

Use the exhibits below to answer the question.

Exhibit1

10/23/2014 14:40 | 2001

Phone Information

20

Model Number:	CP-9971 (Video)
IPv4 Address:	10.1.111.5
Host Name:	SEP8478ACE71D1F
Active Load:	sip9971.9-4-1-9
Last Upgrade:	12/31/81 19:02
Active Server:	10.1.5.16
Stand-by Server:	10.1.5.15

Exit

Exhibit2

Phone Type

Product Type: Cisco 9971


Device Protocol: SIP


Real-time Device Status

Registration: Unknown

IPv4 Address: None

Device Information

 Device is Active

 Device is trusted

MAC Address*

8478ACF71D1F

Description

HQ-Phone 1

Device Pool*

Default

Common Device Configuration

< None >

Phone Button Template*

Standard 9971 SIP

Softkey Template

< None >

Common Phone Profile*

Standard Common Phone Profile

Calling Search Space

phone1_css

AAR Calling Search Space

< None >

Media Resource Group List

< None >

User Hold MOH Audio Source

< None >

[View Data](#)

[View Data](#)

[View Data](#)



Refer to the exhibits

Which configuration option, in the device configuration page, will allow an administrator to assign a device to a group of like devices?

- A. Media Resource Group List
- B. Device Pool
- C. Location
- D. AAR Calling Search Space
- E. Calling Search Space

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Use device pools to define sets of common characteristics for devices. The device characteristics you can specify for a device pool are:

- Region
- Date/time group
- Cisco CallManager group
- Calling search space for auto-registration

Topic 3, Configure Voice Messaging and Presence

QUESTION 12

Which component is needed to facilitate the connection between Cisco Unified Communications Manager and Cisco Unified Presence Server?

- A. SIP trunk
- B. H.323 gateway
- C. Gatekeeper
- D. MGCP gateway
- E. Cisco Unified Border Element

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 13

A technician is preparing to activate the needed services in Cisco Unified Communications Manager to integrate with an IM and Presence server. Which four services must be enabled? (Choose four.)

- A. Cisco TFTP
- B. Cisco AXL Web Service
- C. Cisco CTI Manager
- D. Cisco Messaging Interface
- E. Cisco Intercluster Lookup Service
- F. Cisco Extended Functions
- G. Cisco Unified Communications Manager
- H. Cisco Directory Sync

Correct Answer: ABCG

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Topic 4, Maintain Cisco Unified Communications System

QUESTION 14

An administrator wants to gauge the load and performance capacity of Cisco Unified Communication Manager devices, including conference bridges, gateways, and trunks. Which report would the administrator run?

- A. CAR
- B. CDR
- C. SIP
- D. RTMT
- E. CUBE

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 15

Which option would an administrator use to find all unassigned directory numbers in Cisco Unified Communications Manager?

- A. Route plan report
- B. CDR
- C. CAR
- D. Cisco Reporting Tool
- E. Directory number lookup

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Topic 5, Provide End User Support

QUESTION 16

An end user is unable to sign into Jabber. Assuming that network connectivity has been verified, which three settings for the end user should be checked? (Choose three.)

- A. Jabber Advanced Settings
- B. Cisco Unified Communications Manager Service Profile
- C. Cisco Unified Communications Manager User Management
- D. Cisco Unified Presence Server Advanced Settings
- E. Cisco Unified Presence Server Application Listener
- F. Cisco Unified Presence Server System Topology
- G. Jabber Version

Correct Answer: ABC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 17

A user reports that when they receive a voicemail on their phone, they do not receive it in their email as well. Which feature on Cisco Unity Connection should be checked?

- A. Cisco Unified Messaging Service
- B. Enterprise Parameters
- C. Roles
- D. Message Waiting Indicators
- E. Alternate MWI

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 18

Many users report that there is a delay in receiving MWI notifications for voicemails. Which two issues can cause this problem? (Choose two.)

- A. The Connection Notifier service has been stopped.
- B. Voicemail ports are not configured for MWI requests.
- C. The MWI functionality for the port groups has been disabled.
- D. Not enough MWI assigned ports are available.
- E. MWIs are in the process of synchronizing with the phone system.

Correct Answer: DE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 19

Users report volume issues with recordings in Cisco Unity Connection. Which feature can be disabled to prohibit automatic volume adjustments to recordings?

- A. AGC
- B. Noise Reduction
- C. Audio Normalization
- D. VAD

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 20

Which option allows an engineer to deploy new firmware to a single phone, while reducing possible impact?

- A. Define a new firmware load on specific device. Save configuration and reset individual device.
- B. Define load in device defaults. Reset Device Pool.
- C. Upload firmware to TFTP server. Restart TFTP service.
- D. Enable Peer Firmware Sharing.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Topic 6, Mix Questions

QUESTION 21

Which two layers are Cisco Unified Communications component layers? (Choose two.)

- A. Infrastructure layer
- B. Data link layer
- C. Network layer
- D. Endpoints layer
- E. Transport layer

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 22

Which three choices are functions or features of Cisco Unity Connection? (Choose three.)

- A. video-enabled messaging through converged networks
- B. text-to-speech, which allows access to Exchange emails from a telephone
- C. voice-enabled message navigation
- D. voice-enabled dialing to external users
- E. automated attendant capabilities
- F. automated call rerouting to agents through round robin, longest idle, or broadcast

Correct Answer: BCE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 23

An SCCP IP phone places a call to a SIP phone that is registered to the same Cisco Unified Communications Manager Express. During the active call, call waiting indicates a second call is incoming to the handset, but the user decides to ignore it. In this scenario, what is the combined total number of signaling conversations and media flows that used the SCCP phone as an endpoint?

- A. 2
- B. 3
- C. 4
- D. 5
- E. 6

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 24

Which port is the default port for SCCP call signaling on Cisco Unified Communications Manager?

- A. 2000
- B. 2443
- C. 5060
- D. 5061

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 25

Which three choices are required for the boot process for a Cisco IP phone? (Choose three.)

- A. TFTP services
- B. DHCP services
- C. Voice VLAN
- D. Routing protocol
- E. TCP/IP
- F. PortFast

Correct Answer: ABC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 26

Which three tools are used to create phone user accounts in Cisco Unified Communications Manager Express? (Choose three.)

- A. Cisco Configuration Professional
- B. CPE
- C. CLI
- D. GUI
- E. TUI
- F. Cisco Security Device Manager

Correct Answer: ACD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 27

Which menu does a voice engineer use to create a phone user account in the Cisco Unified CME GUI?

- A. Configure
- B. Voicemail
- C. Administration
- D. Reports

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 28

Which menu should be used to create a username and password in the Cisco Unified CME GUI?

- A. configure > pilot number
- B. configure > extension
- C. configure > phones
- D. configure > system parameters

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 29

Which menu option should be selected to add a desk phone as an endpoint in Cisco Unified Communications Manager?

- A. Application
- B. Device
- C. System
- D. User management
- E. Media devices

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 30

When you attempt to add a phone to the Cisco Unified Communications Manager Express using the GUI interface, the error "No New Phone to Add" appears. Which command is causing the error?

- A. No auto-reg-ephone
- B. No service ephone-reg
- C. SIP-ua no auto-reg-ephone
- D. stcapp ccm-group 1

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 31

Which scenario allows user A in partition X to call user B in Cisco Unified Communications Manager?

- A. User B in partition X is not assigned to any CSS.
- B. User B in partition Y assigns both partitions to CSS-X.
- C. User B is not assigned to any partition or CSS.
- D. User B is assigned to partition Y and assigns to CSS-X.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 32

Which describes how to provide a third directory number button and a BLF speed dial for twelve of the Cisco Unified IP Phone 7965?

- A. Modify the Standard User softkey template.
- B. Copy the Standard User softkey template, name it, and add the requested features.
- C. Copy the Standard 7965 SCCP phone button template, rename it, and add the requested features.
- D. It is not possible to add a third DN and a BLF speed dial to the IP Phone 7965 IP.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 33

Which profile must be added to the end user profile when enabling an end user for Cisco Unified Presence?

- A. Device profile
- B. UC service profile
- C. Extension mobility profile
- D. SIP profile

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 34

Which two user types are available to a voice engineer adding a user in Cisco Unity Connection? (Choose two.)

- A. User with mailbox
- B. Imported user
- C. Synch user
- D. User without mailbox
- E. Local admin user with mailbox

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 35

Which type of template should be used when a network engineer adds a new call center agent in the Cisco Unity Connection?

- A. Contact
- B. Call handler
- C. User
- D. Notification

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 36

Which four fields must an administrator complete to create a new user in Cisco Unity Connection? (Choose four.)

- A. Alias
- B. User type
- C. Extension
- D. Corporate email address
- E. First name
- F. Last name
- G. Employee ID
- H. Template

Correct Answer: ABCH

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 37

For which three reasons would a voice engineer create a separate user template in Cisco Unity Connection? (Choose three.)

- A. Certain users changed their extensions.
- B. Certain users are in a different partition.
- C. Certain users are using a different call handler.
- D. Certain users are using a different phone system.
- E. Certain users are being added to Cisco Unified Presence Server.
- F. Certain users are being moved to a different branch office.

Correct Answer: BCD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 38

Which transport layer protocol is used when a Cisco Unified Presence client is searching for a contact in directory?

- A. TCP
- B. UDP
- C. IMAP
- D. HTTP

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 39

Which options are two on-premise components of Cisco Unified Presence? (Choose two.)

- A. Cisco Unified Communication Manager
- B. Cisco Unified Contact Center Express
- C. Cisco WebEx
- D. Cisco Quality Management
- E. Cisco Unified Contact Center Enterprise

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 40

Which client supports Cisco Unified Presence?

- A. Jabber
- B. Lync
- C. Skype
- D. Quip

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 41

Which type of signaling does desktop control mode use to control a desk phone?

- A. CTIQBE
- B. SIP
- C. XMPP
- D. SCCP

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 42

The receptionist has a Cisco 7965 phone with 24-button side-car configuration. The side-car button of the phone does not light up when the line is in use. Which phone configuration is missing?

- A. Subscriber calling search space
- B. Location
- C. BLF audible alert setting
- D. Phone button template

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 43

A voice engineer configured a Cisco Unified Presence client for a new employee. The CSF device and user are associated, but the end user cannot make a call using Cisco Unified Personal Communicator softphone mode. Which configuration item should be checked next to identify the issue?

- A. Client service framework
- B. Common device configuration
- C. Calling search space
- D. Route pattern

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 44

DRAG DROP

Drag the steps on the left to the correct order on the right for configuring the end user Cisco Unified Personal Communicator.

1	Configure end users in Cisco Unified Communications Manager.
2	Create Cisco Unified Client Services Framework device.
3	Assign license in Cisco Unified Communications Manager.
4	Associate DN to end users
5	Associate CSF device to end user

- A.
- B.
- C.
- D.

Correct Answer:

Section: (none)

Explanation

Explanation/Reference:

Drag the steps on the left to the correct order on the right for configuring the end user Cisco Unified Personal Communicator.

1	2
2	3
3	1
4	5
5	4

Explanation:

1. Assign license in Cisco Unified Communications Manager
2. Create end users in Cisco Unified Communications Manager
3. Create Cisco Unified client services framework device
4. Associate CSF to end user
5. Associate DN to end user

QUESTION 45

Which navigation pane should be selected to view the CDR statistics?

- A. Cisco Unified Serviceability
- B. Cisco Unified CM Administration
- C. Cisco Unified Reporting
- D. Cisco Unified OS Administration

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 46

Which Cisco Unified Communications Manager system report shows high and low call volume patterns?

- A. CAR report
- B. QoS by Gateway
- C. QoS by call types
- D. Traffic summary
- E. Traffic summary by extension

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 47

Which Cisco Unified Communications Manager device report provides key information to determine if an additional gateway is needed?

- A. Gateway utilization
- B. Gateway summary
- C. Gateway detail
- D. Gateway and line group utilization

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 48

Which four tasks does RTMT allow an administrator to perform? (Choose four.)

- A. View syslog messages.
- B. Generate alerts when threshold is below or above user-configured.
- C. Monitor a set of predefined management objects that monitor the health of the system.
- D. Collect information and traces about errors or alerts that exist in the RTMT.
- E. Reboot the system.
- F. Perform incremental backups.

G. Export CDR.

Correct Answer: ABCD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 49

Which command is used to troubleshoot calls as they enter and leave a PRI connection?

- A. Debug isdn q 931
- B. Show voice call summary
- C. Debug voip dialpeer
- D. Show dial-peer voice summary

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 50

Which configuration causes PSTN users to experience a fail tone for every other call when trying to reach a particular number on Cisco Unified CME?

- A. ephone-dn is not assigned to the ephone.
- B. Duplicate ephone-dn is not assigned to the ephone.
- C. ephone is not registered.
- D. ephone does not exist for the ephone-dn.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 51

Which Cisco Unified Communications Manager configuration causes an IP phone screen to display a "registration rejected" message?

- A. Cisco Unified Communications Manager is unable to reach user IP phone.
- B. Cisco Unified Communications Manager database replication status is 2.
- C. Cisco Unified Communications Manager auto registration is disabled.
- D. Cisco Unified Communications Manager is unable to allocate DN.
- E. Cisco Unified Communications Manager subscriber is offline.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 52

Customer requirements dictate that local calls from area code 408 display the ANI as a 7-digit number. Which procedure allows the leading digits to be stripped as soon as they arrive at the

- A. 323 voice gateway?
- B. Set up a voice translation rule, apply the translation rule to a translation profile, and apply the translation profile to the dial peer in the inbound direction.
- C. Set up a voice translation profile, apply the translation profile to a translation rule, and apply the translation rule to the dial peer in the outbound direction.
- D. Set up a voice translation rule, apply the translation rule to a translation profile, and apply the translation profile to the dial peer in the outbound direction.
- E. Set up a voice translation profile, apply the translation profile to a translation rule, and apply the translation rule to the dial peer in the inbound direction.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 53

An end user has made more attempts to log in than allowed, using the wrong voice-mail pin. The user has been locked out. Which submenu does an administrator select to unlock the pin?

- A. Change password

- B. Password settings
- C. Message settings
- D. Mailbox

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 54

Which three methods can remotely force a Cisco Unified Communications Manager Express phone to reset? (Choose three.)

- A. Issue a shutdown, no shutdown command on a switch port that provides PoE to a Cisco phone.
- B. Issue the restart command under the ephone-dn configuration of the phone.
- C. Issue the reset command under the ephone configuration of the phone.
- D. Issue the reset command under the ephone-dn configuration of the phone.
- E. Issue the reset H.H.H (mac-address) command telephony-service configuration.
- F. Issue the reset H.H.H (mac-address) command under global configuration.

Correct Answer: ACE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 55

Two departments have their own call-park slot to park calls. Which feature on Cisco Unified CME allows one department to answer a call for another department?

- A. Call park
- B. Call forward
- C. Call transfer
- D. Pickup-group
- E. Barge-in

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 56

What is the maximum number of digits that an ephone PIN can have to allow after-hour exempt calling privileges?

- A. 4
- B. 6
- C. 7
- D. 8
- E. 9

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 57

Which protocol is used to monitor active voice call quality?

- A. RTCP
- B. RTP
- C. QoS
- D. STP
- E. SDP

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 58

DRAG DROP

Drag the functionality on the left to the correct protocol on the right.

time synchronization	NTP
option 150	VLAN
virtual broadcast domain	TFTP
IP address management	DHCP
option 67	
MAC address management	

- A.
- B.
- C.
- D.

Correct Answer:

Section: (none)

Explanation

Explanation/Reference:

Drag the functionality on the left to the correct protocol on the right.

time synchronization
option 150
virtual broadcast domain
IP address management
option 67
MAC address management

time synchronization
virtual broadcast domain
option 150
IP address management

Explanation:

time synchronization

virtual broadcast domain

option 150

IP address management

QUESTION 59

Which component is needed for a voice call to be processed between the enterprise Cisco Unified Communications system and a cell phone via the PSTN?

- A. Cisco Analog Voice Gateway VG224
- B. Cisco Unified Communications Manager call processing node
- C. Cisco Unified Communications Manager Music On Hold node
- D. Cisco Integrated Service Router with digital signal processor resources

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 60

What is needed to support SIP Early Media?

- A. Media Termination Point
- B. Transcoder
- C. Annunciator
- D. Conference Bridge
- E. DSP
- F. Route List

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 61

The IP phone of user A is registered with Cisco Unified Communications Manager subscriber1 while the IP phone of user B is registered with subscriber2. User A is speaking to user B on an active call. A junior network engineer mistakenly reboots subscriber1.

What effect does this have on the call?

- A. User A can hear B, but B cannot hear A.
- B. User A cannot hear B, but B can hear A.
- C. This action drops the call.
- D. This action does not affect the call.
- E. The call remains active, but quality may suffer.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 62

A company has invested in an on-premises VoIP solution. For design simplicity purposes, network engineers have opted to use a single VLAN for both data and voice traffic. Shortly after implementing IP phones, customers are reporting problems.

Which two potential problems may be reported about the calls as a result of this design decision? (Choose two.)

- A. jitter detected in voice calls

- B. problems with email latency
- C. slow internet download speeds
- D. choppy voice calls
- E. PCs are getting IP addresses but phones are not

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 63

A network engineer receives a report about poor quality on an active call between the IP phone of user A over the WAN to the IP phone of user B. Using web access to the phone, the network engineer remotely checks call statistics such as jitter, network delay, and packet loss. Calculated packet loss is 3%, average jitter is 20 ms, network delay is 1 ms, and conceal seconds is 7.

What is the most likely problem with this call?

- A. Calculated packet loss is too high.
- B. Average jitter is too high.
- C. Network delay is too high.
- D. Conceal seconds are too high.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 64

Why is quality of service critical to voice network traffic?

- A. Voice traffic is real-time network traffic.
- B. Packets can be resent without affecting conversations.
- C. Voice traffic is bursty in nature.
- D. Voice traffic cannot be compressed.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 65

Which two options are available when adding a user to Call Unity Express? (Choose two.)

- A. GUI
- B. CLI
- C. BAT
- D. TAPS
- E. LDAP

Correct Answer: AB

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 66

Which utility is recommended for a network administrator who must provision 300 users in Cisco Unified Communications Manager?

- A. Batch Accounts Tool
- B. Bulk Administration Tool
- C. Bulk Accounts Tool
- D. Batch Administration Tool

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 67

Which Cisco Unified CME GUI menu option is used to navigate to the screen used to add or change a user name or password using the Cisco Unified CME GUI interface?

- A. Administration > Update System Info
- B. Configure > System Parameters
- C. Configure > Phones
- D. Configure > Extensions

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 68

Which two options are configured on the phone configuration page within Cisco Unified Communications Manager Administrator? (Choose two.)

- A. device pool
- B. auto answer
- C. partition
- D. voice-mail profile
- E. MAC address

Correct Answer: AE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 69

Which two options are configured on the directory number configuration page within Cisco Unified Communications Manager Administrator? (Choose two.)

- A. partition
- B. MAC address
- C. auto answer
- D. softkey template
- E. common device configuration
- F. max calls

Correct Answer: AF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 70

An administrator wants to add and configure an ephone-dn via the Cisco Unified Communications Manager Express web GUI. Which feature must be defined under telephony service configuration?

- A. auto-reg-ephone
- B. auto-reg-dn
- C. max-ephones
- D. max-dn
- E. dn-webedit

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 71

To control telephony costs, management wants to restrict who can place long distance calls. Which two options allow for this restriction? (Choose two.)

- A. calling search space
- B. partitions
- C. route groups
- D. SIP trunk
- E. gateway

Correct Answer: AB

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 72

A user wants their name to show on their phone instead of their directory number. Which configuration item allows an administrator to do this?

- A. Line Text Label
- B. Alerting Name
- C. External Phone Number Mask
- D. Caller Name
- E. Description

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 73

A company has a 5-digit dial plan. A junior engineer inquires about the directory number external masks. Why are external masks used?

- A. to block calling number identification
- B. to enable called number identification
- C. to convert the calling directory number to the PSTN routable calling directory number
- D. to associate a directory number with a SIP endpoint

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 74

Which two components are needed before a user can be assigned to a Presence node? (Choose two.)

- A. Cisco Unified Communications Service
- B. service profile
- C. phone button template
- D. mobility profile
- E. device profile

Correct Answer: AB

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 75

Which two items must first be configured before users can be added into Unity Connection via the Bulk Administration Tool? (Choose two.)

- A. partitions
- B. classes of service
- C. search spaces
- D. user templates
- E. schedules

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 76

Which four actions can be selected with the Bulk Administration Tool in Cisco Unity Connection? (Choose four.)

- A. Create
- B. Modify
- C. Migrate
- D. Update
- E. Delete
- F. Export
- G. Purge
- H. Manage

Correct Answer: ADEF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 77

An engineer is syncing Cisco Unity Connection with LDAP. Which three things should the engineer consider during this process? (Choose three.)

- A. PINs and passwords are replicated from the LDAP database to Cisco Unity Connection database.
- B. LDAP authentication must be configured and enabled.
- C. There is no limit to the amount of LDAP filters that can be created.
- D. SSL certificates from LDAP must be uploaded to Cisco Unity Connection.
- E. LDAP synchronization must be configured and enabled.
- F. Cisco Unity Connection supports integrations with OpenLDAP.

Correct Answer: CEF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 78

Which three methods can an engineer use to create users in Cisco Unity Connection? (Choose three.)

- A. Local
- B. Cisco Unified Presence Server
- C. Cisco Unified Communications Manager
- D. LDAP
- E. TMS
- F. Outlook

Correct Answer: ACD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 79

Which two protocols does Jabber use to achieve Presence status? (Choose two.)

- A. SIP/SIMPLE

- B. XMPP
- C. SCCP
- D. MGCP
- E. SOAP

Correct Answer: AB

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 80

An engineer has deployed IM-user-only mode for the IM and Presence Service. Which two features will be available? (Choose two.)

- A. third-party XMPP clients are not supported
- B. IM and Presence support without Cisco Unified Communications Manager
- C. audio/video calling
- D. Cisco Unity voicemail retrieval via SMTP
- E. XMPP federation capabilities

Correct Answer: BE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 81

Which IM and Presence chat feature allows for an always-available chat room that remains active, even if all of the participants leave the chat?

- A. Personal
- B. Group
- C. Persistent
- D. Ad-hoc

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 82

Which two benefits does Cisco Unified IM and Presence Service bring to businesses? (Choose two.)

- A. enhances productivity by using availability awareness and reduce communications delays
- B. provides Enterprise IM capabilities, such as persistent chat, group chat, and IM history
- C. provides and streamlines enterprise audio and video communications
- D. enhances communications by providing multipoint conference capabilities
- E. supports standard-based XMPP clients by supporting native SIP/SIMPLE and H.323 protocols

Correct Answer: AB

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 83

In which section of Cisco Unified Communications Manager are Call Detail Records viewed?

- A. Cisco Unified Serviceability
- B. Cisco Unified OS Administration
- C. Cisco Unified Reporting
- D. Cisco Unified Communications Manager Administration
- E. Cisco Unified Disaster Recovery

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 84

CDR/CMR Reporting is being enabled on Cisco Unified Communications Manager. As part of this process, which two service parameters must be activated? (Choose two.)

- A. Cisco CAR Web Service

- B. CDR Enabled Flag
- C. Cisco Serviceability Reporter
- D. Call Diagnostics Enabled
- E. Statistics Enabled

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 85

For capacity planning purposes, a network administrator must provide a report to management that displays the number of phones registered per server. Where can the administrator obtain this information?

- A. Navigate to Cisco Unified Serviceability > Tools > Serviceability Reports Archive.
- B. Navigate to Cisco Unified Operating System Administration > Tools > System Reports.
- C. Navigate to Cisco Unified CM Administration > Tools > System Reports.
- D. Navigate to Cisco Unified Reporting > Tools > System Reports.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 86

Which report in the CAR tool provides information about the call volume for a specified period?

- A. traffic summary report
- B. Top N duration report
- C. precedence call summary report
- D. gateway utilization report

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 87

An administrator wants to verify that a new PRI is properly connected to the PSTN status. Which Layer 2 status should be seen?

- A. MULTIPLE_FRAME_ESTABLISHED
- B. TEI_ASSIGNED
- C. LINK_UP
- D. CONTROLLER_UP

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 88

After getting reports that users cannot make calls out to the PSTN, a network administrator opens the Cisco Unified Communications Manager Administration web page and begins to review route patterns. Why would the administrator look here when troubleshooting PSTN connectivity troubles?

- A. A route pattern contains a list of gateways that can reach the PSTN.
- B. A route pattern contains dial plan information for calling the PSTN.
- C. A route pattern contains the necessary privileges for calling the PSTN.
- D. A route pattern contains a list of SIP trunks that can reach the PSTN.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 89

A user reports that several IP phones in a single department are displaying a continuous "registering" message. Which fault domain should be investigated?

- A. network router
- B. Cisco Unified Communications Manager subscriber node

- C. network switch
- D. IP phones
- E. SIP gateway

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation: